

## Technical data sheet

---

### TigaSafe ZS 300–1000 T

Stainless steel anchor point for cable systems, for fastening to trapezoidal sheet metal, trapezoidal profiles and sandwich panels, min. thickness 0.50 mm.

Type A and Type C


The respective fasteners are supplied.

#### **Description:**

Anchor point for max. 2 people, Base plate  
360 x 220 mm or 380 x 220 mm, Support  
diameter 16 mm  
Made of stainless steel 1.4301

#### **Tested according to:**

EN 795:2012  
CEN/TS 16415:2013

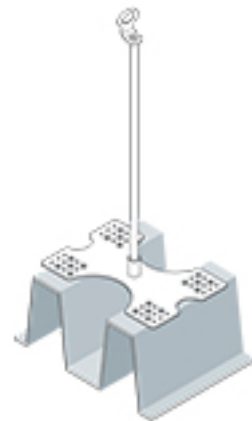

**Bending of the TigaSafe support or all other components is prohibited.  
Load tests in the horizontal direction are not permitted.**

The ZS 300-1000 T must be installed according to the applicable product installation instructions.

The current standards and guidelines must also be observed (ÖNORM B 3417, AUVA).

The safety regulations of the company TigaTech GmbH must be strictly followed. It is essential to use the supplied mechanical fasteners for the corresponding surface.